

### RELAYS (Relais)

INDEX	POSITION IN MACHINE	COILS SPULEN	CONTACTS	USE
	LIGHT BOX	NO. COLOR	KONTAKTE	BEZEICHNUNG
4E	J	11,500 PINK	3A-20	DOUBLE BONUS
14E	J	9,500 YELLOW	4A-B	BONUS SCORE
6E	K	9,500	3A	100,000 POINTS
8E	L	9,500	5A	1,000 POINTS
5E	M	9,500	5A	1,000 POINTS
5E	N	9,500	5A	100 POINTS
3E	O	9,500	3A	500 POINTS
3E	P	9,500	4A-B	5,000 POINTS
16E	R	13,500 SLATE	A-2B	HOLD
14E	S	9,500 YELLOW	4A-2B	BALL RETURN
13E	T	11,500	4A-2C	TILT
13E	U	11,500	3A-B-C	EXTRA BALL
16E	V	9,500	3A-C	BEGINNING BALL
16E	X	9,500	4A-B-20	START RELAY
16E	Y	9,500	2A-B-20	1ST. COIN CHUTE
16E	Z	9,500	2A-B-20	3RD. COIN CHUTE
16E	AA	9,500	3A	COINS CONTROL
16E	AB	9,500	5A-B	1ST. PLAYER RESET
11E	AC	9,500	6A-B	2ND. & 3RD. PLAYER RESET
11E	AD	9,500	6A-B	3RD. & 4TH. PLAYER RESET
7E	AE	107,950	2, 2100	5000 POINTS TARGETS RESET

### BANK (Bankrelais)





INDEX	POSITION IN MACHINE	COILS SPULEN	CONTACTS	USE
	LIGHT BOX	NO. COLOR	KONTAKTE	BEZEICHNUNG
14E	J2	9,500 YELLOW	3A-B	2ND. PLAYER
14E	J3	9,500	3A-B	3RD. PLAYER
14E	J4	9,500	2A-2B	4TH. PLAYER
14E	GO	9,500	2A-2B-C	GAME OVER
14E	UB	9,500	5A-B	LAST BALL
14E	PM2	9,500	2A-3B	2ND. RESET CONTROL
14E	PM1	9,500	A	1ST. RESET CONTROL

### Other coils used (übrige spulen)

INDEX	DESCRIPTION
	BESCHREIBUNG
1H	LEFT FLIPPER COIL
1H	RIGHT FLIPPER COIL
1F	LEFT KICKING RUBBER COIL
1F	RIGHT KICKING RUBBER COIL
1F	LEFT BUMPER COIL
1F	RIGHT BUMPER COIL
4E	ADD. BONUS COIL
15E	ADD. REPLY COIL
6E-8E	SCORING UNIT COILS
14E	SUBTRACT BONUS COIL
15E	SUBTRACT REPLY COIL
13E	TOTAL PLAY METER COIL
13E	MOTOR
11E	PLAYERS UNIT COIL
13E	BALL RETURN COIL
15F	COIN LOCK OUT COIL
16E	BANK COIL
16E	TRANSFORMER
13E	LEFT BANK 1
13E	RIGHT BANK 2


### FUSES (Sicherungen)

INDEX	POSITION IN MACHINE	USE
	LIGHT BOX	BEZEICHNUNG
17H	8AMP	PRIMARY
17I	15AMP	25V, 30V, 32V, ADJ.
16H	10AMP	BANK
11G	10AMP	PROTECTING PRINTED CIRCUITS
1F	10AMP	DIRECT CURRENT
6D	8AMP	COIN CHUTE ILLUMINATION
6D	8AMP	PLAYERS SCORE
8D	8AMP	NAME & SCENE ILLUMINATION
8D	8AMP	PLAYBOARD ILLUMINATION
4B	1AMP	LT 000-900

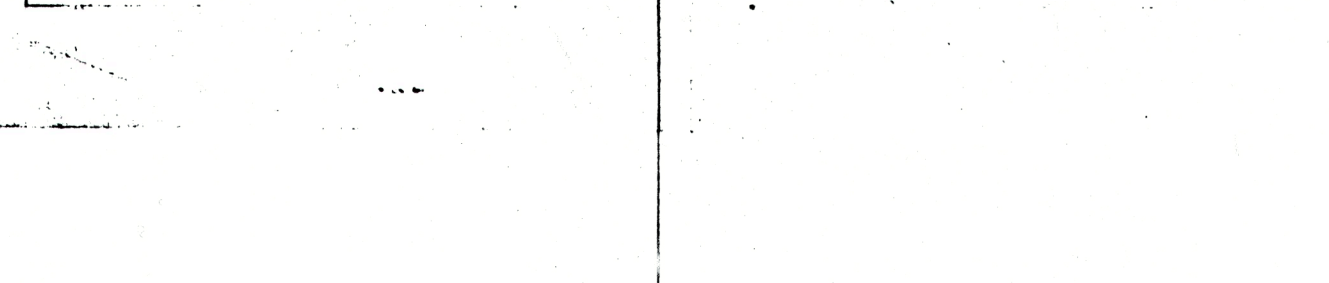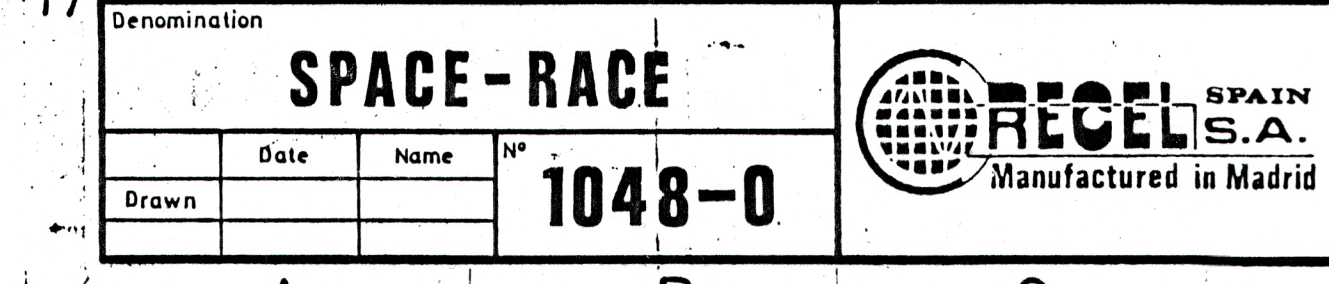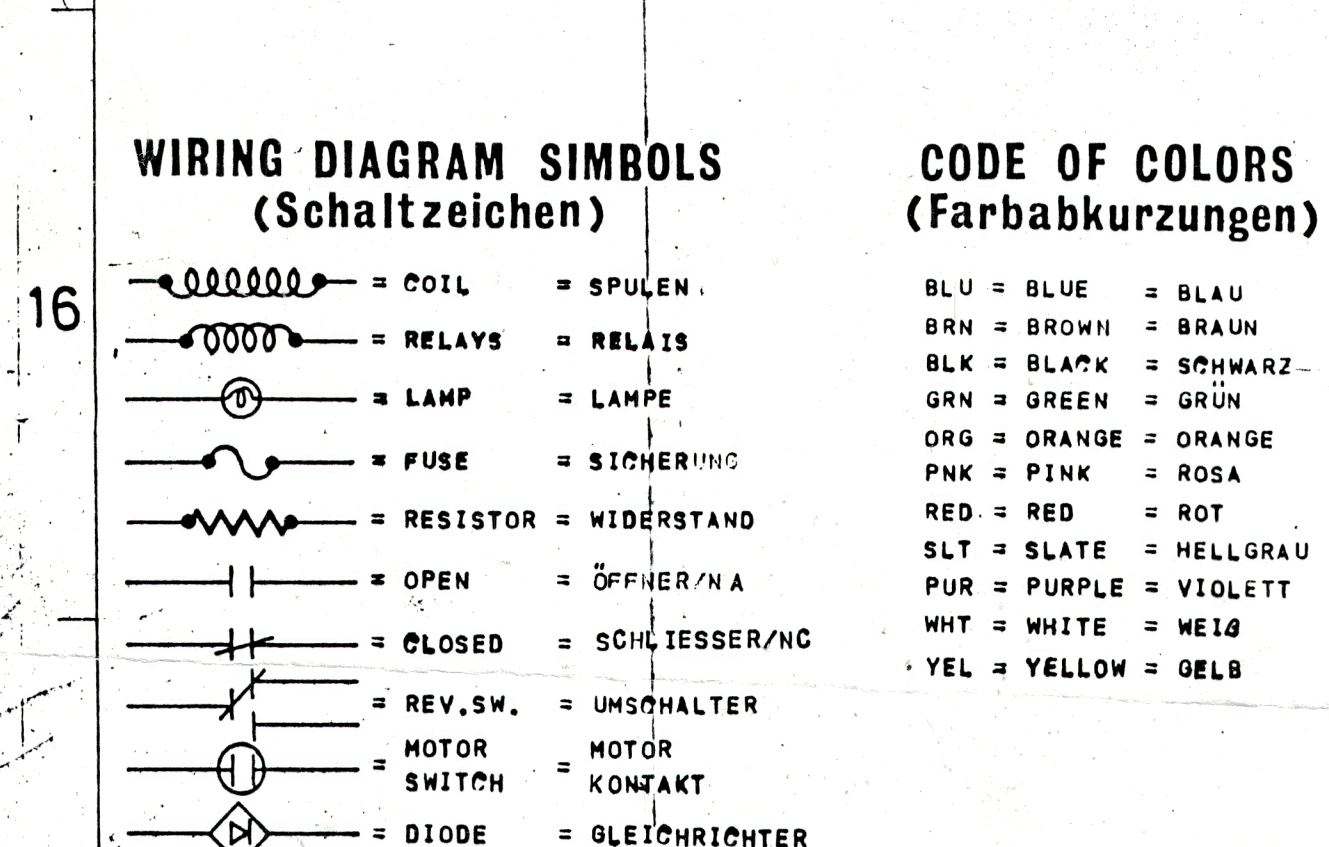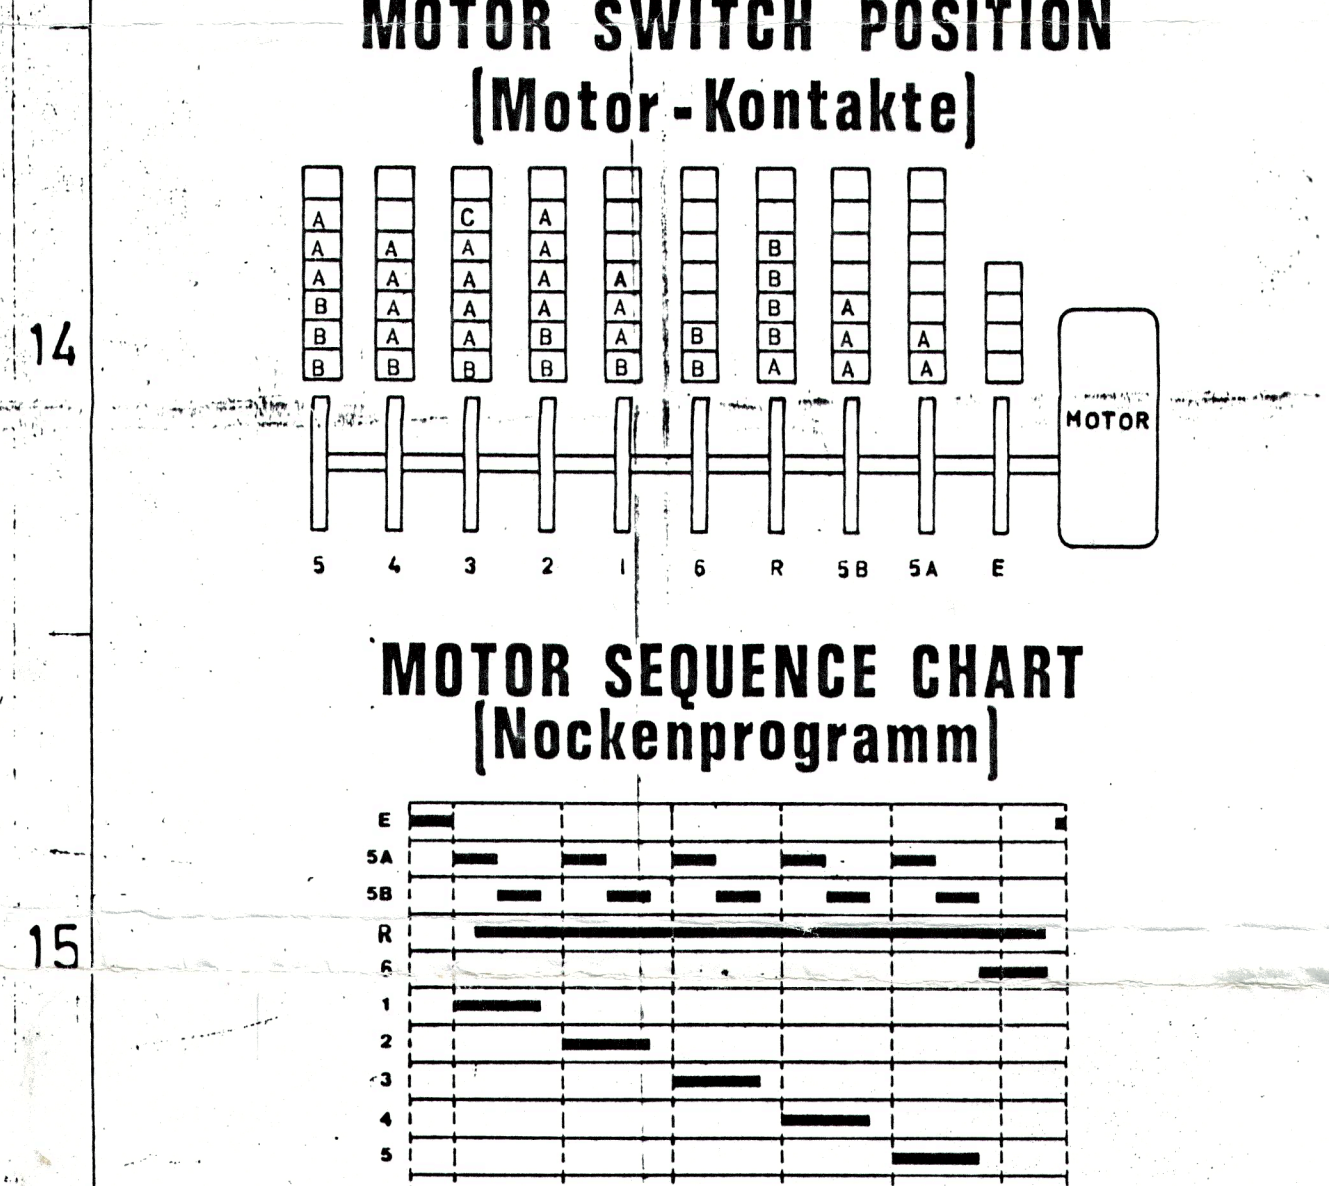

### WIRING DIAGRAM SYMBOLS (Schaltzeichen)

	= COIL = SPULEN		= RELAYS = RELAIS
	= LAMP = LAMPE		= FUSE = SICHERUNG
	= RESISTOR = WIDERSTAND		= OPEN = ÖFFNER/A
	= CLOSED = SCHLIESSER/NC		= REV. SW. = UMSCHALTER
	= MOTOR = MOTOR		= SWITCH = KONTAKT
	= DIODE = GLEICHTRIEBIG		

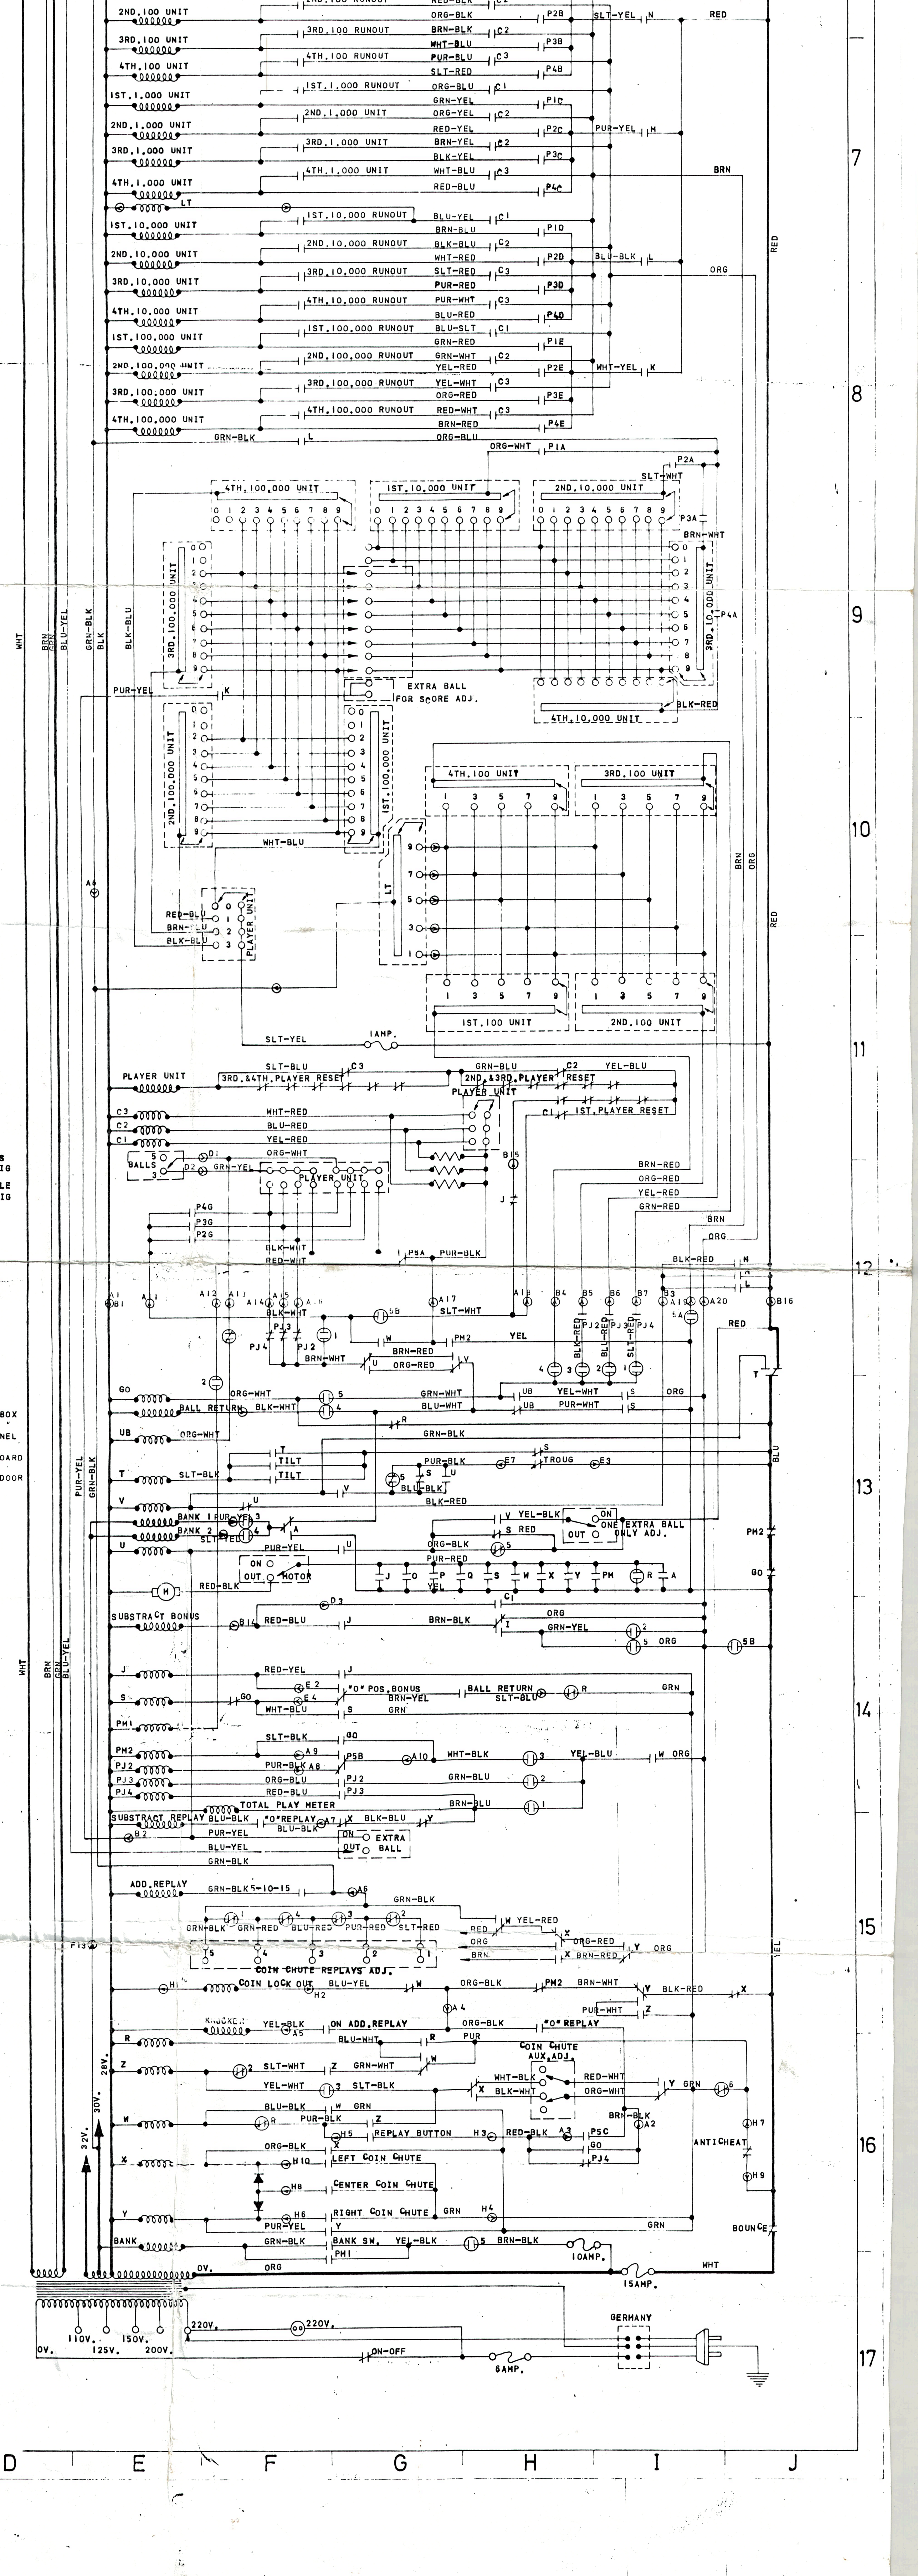

**SPACE RACE**

RECEL S.P.A. Manufactured in Madrid

1048-0